


KS280 Smart Lock

For the KS280 keypad and lever smart lock, all finishes and all published backsets.

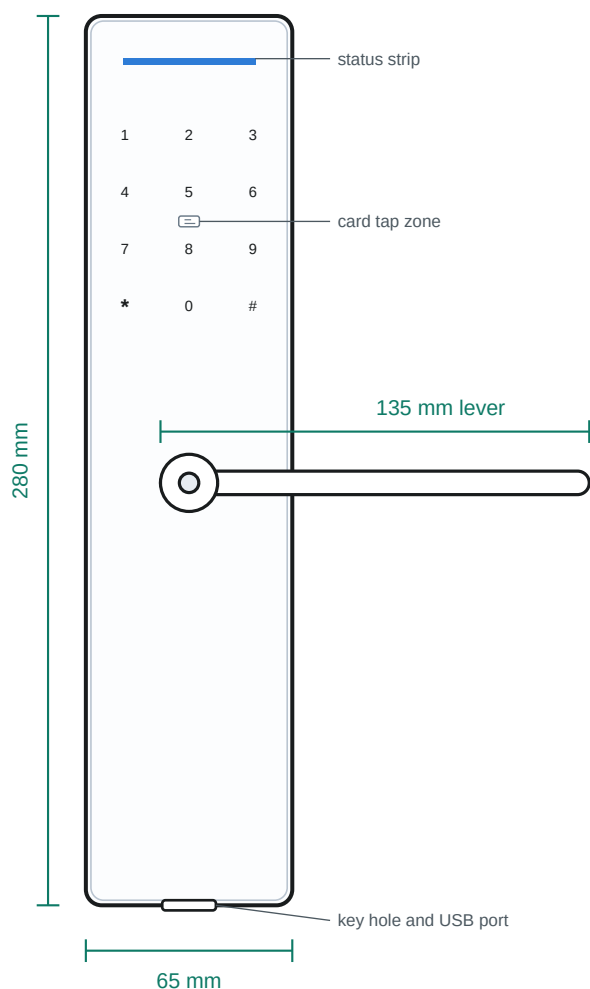

DIMENSIONS AND FINISH

Panel	280 x 65 mm
Overall with lever	Not published
Lever length	135 mm, the lever alone
Lever projection	48 mm from the panel face
Panel depth	21 mm
Spindle supplied	80 mm
Backsets published	0, 30, 35, 40, 45, 50, 60 and 70 mm
0 mm option	What it includes is being confirmed. Ask before ordering it.
Finishes	Black and Silver
Material	Aluminium alloy

ELECTRICAL AND ENVIRONMENT

Batteries	4 x AA
Weather rating	IP65
Bluetooth	4.0 or above
Remote access	Gateway ready. The Wi-Fi gateway is a separate purchase.
USB emergency power	Yes, on the bottom edge of the outside panel. Power only: it does not open the lock or charge the batteries.

ACCESS

Opens by	TTLock app, PIN code, RFID card, mechanical key
Key hole	On the bottom edge of the outside panel
Fingerprint	Not on this model
Keypad	3 columns x 4 rows
App	TTLock, by Hangzhou Sciener. Not a Keyless Solutions app.

DOOR PREPARATION · TO BE CONFIRMED

Drilling centres are being confirmed with the manufacturer. Do NOT set a door out from this sheet: it is not printed at true size. Use the true size fitting template for this model, and drill only from a card cut for your exact backset. If no such card came with your lock, call 09 238 2377 before you drill.

Sources: Our KS280 drawing and our KS280 listing on keylessolutions.nz. Spindle from the manual in the carton.

Keyless Solutions · keylessolutions.nz · 09 238 2377 · Check KS-DS-280 Rev A is current before specifying.